



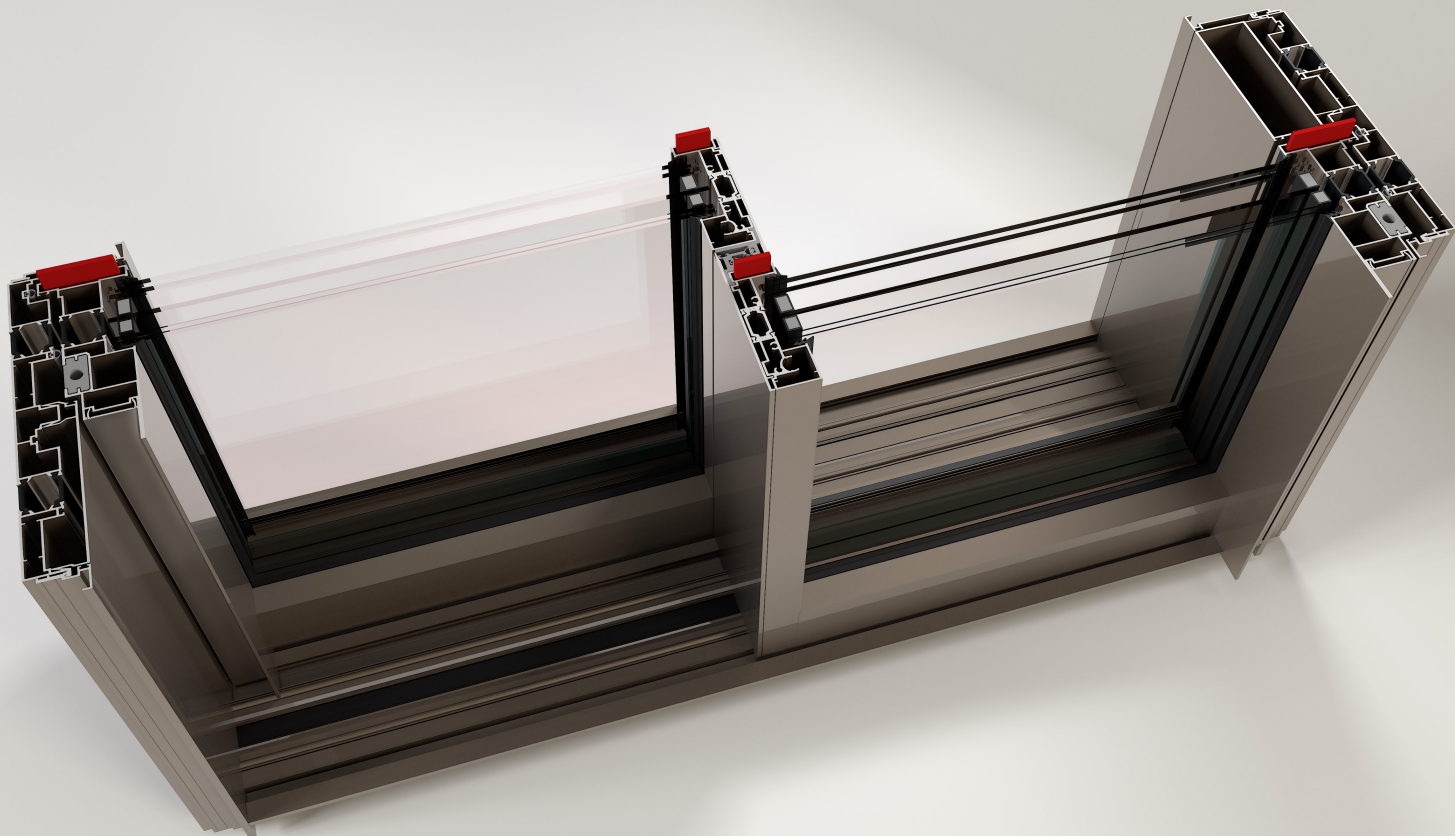

ANTIEFFRAZIONE



RC4

ISOLAMENTO TERMICO



UW 1.2

TENUTA ALL'ACQUA




CL. 7A

RESISTENZA AL CARICO DEL VENTO




CL. C5

PERMEABILITA' ALL'ARIA



CL.3

ABBATTIMENTO ACUSTICO




35 Db




IKONA SLIDE BLINDO

Sezioni - Sections


Nodo Laterale

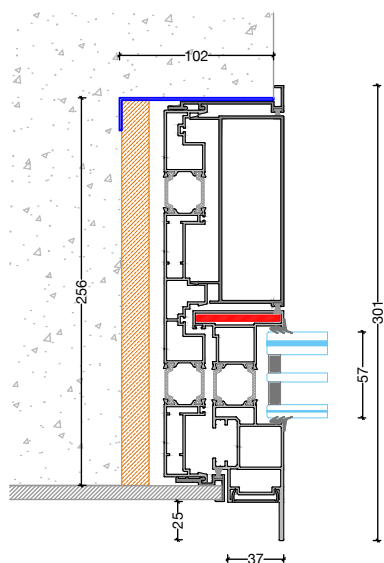


Nodo Centrale

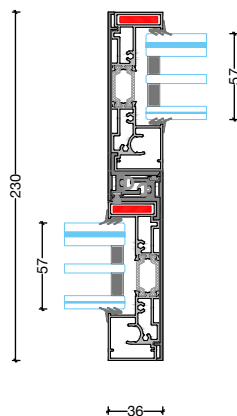


Nodo Laterale Monorotaia

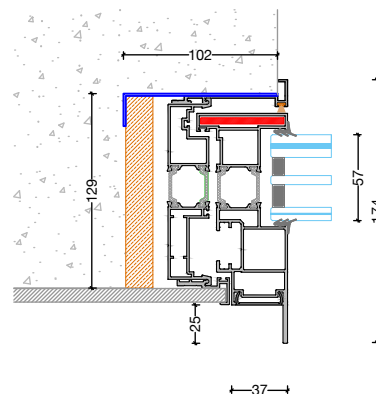

Nodo Superiore

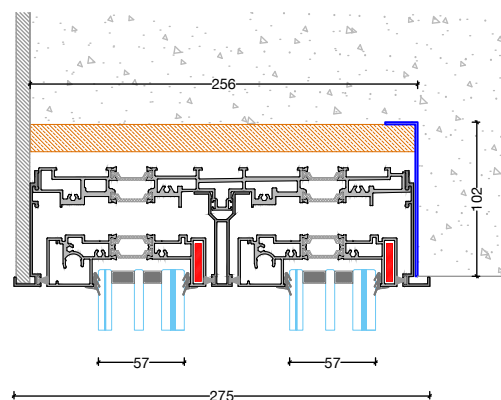


Nodo Superiore Monorotaia

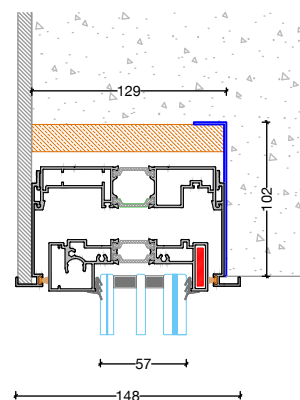


Nodo Inferiore


Soglia su pavimento

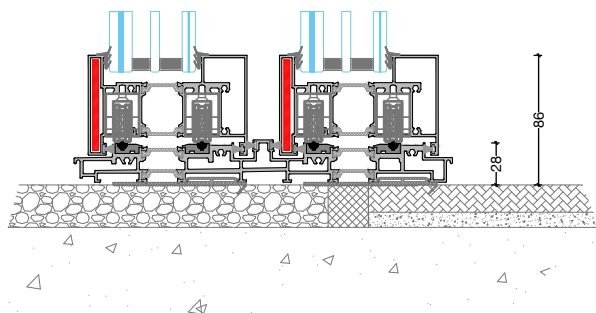

Soglia incassata

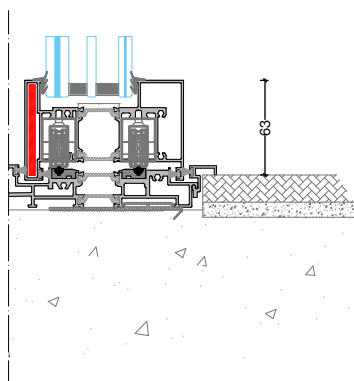

Soglia/anta incassata

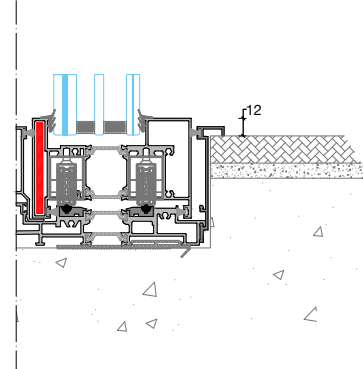



PROFILATI

Profili in estruso di alluminio lega 6060 confermativa UNI 9006/1 (88/90). Lo stato della finitura è T5

BLINDATURA

Profili blindati con piatti di acciaio INOX AISI 430 sp. 4 mm posti nella parte esterna dei profilati a protezione degli accessori e dell'inserimento del vetro blindato

ACCESSORI

- . Maniglia in ottone e serratura a "rottura controllata"
- . 1/2 cilindro europeo di sicurezza
- . N°4 carrelli per anta con cuscinetti in acciaio ad alta portata
- . Rostro centrale "auto-agganciante" in estruso di alluminio
- . Chiusure anti-effrazione maggiorate in acciaio inox
- . Spine perimetrali di sicurezza in acciaio inox diam. 12mm
- . Guarnizioni in EPDM e spazzolini in teflon
- . Viteria in acciaio inox

CARATTERISTICHE TECNICHE E DIMENSIONALI

Sistema di sicurezza composto da profili estrusi in alluminio a taglio termico sezione 253mm telaio / 105 anta. Quest'ultima posta su doppie guide in acciaio inox trafilato per garantire alte porta e minori attriti.

Isolamento termico realizzato con distanziali in poliammide da 27mm su ante che telaio.

VETRATURE

La serie Ikona Slide Blindo utilizza un vetro blindato anticrimine in classe P6B/P8B in vetro-camera con canaline termiche

FINITURE

- . Tinte RAL, raggrinziti e gotici sono verniciati mediante polveri poliesteri termoindurenti e polimerizzati in forno nel rispetto delle procedure di qualità "Qualicoat".
- . Effetti legno realizzati tramite film sublimatico (trasferimento a caldo "heat-trasfer") nel rispetto delle procedure "Qualideco"
- . Ossidazione anodica ha classe di spessore > a 15 micron

PRESTAZIONI E CERTIFICAZIONE

- . **CERTIFICAZIONE ANTIEFFRAZIONE CLASSE RC4** - norma UNI ENV 1227/30:2011
- . **PERMEABILITA' ALL'ARIA CLASSE 3** - norma EN 12207
- . **TENUTA ALL'ACQUA CLASSE 7A** - norma EN 12208
- . **RESISTENZA AL CARICO DEL VENTO CLASSE C5** - norma EN 12210
- . **ABBATTIMENTO ACUSTICO 35 Db** - norma EN 140-1 33
- . **TRASMITTANZA TERMICA U_w 1.2 W/m²K** Valori ottenuti per una portafinestra 2 ante con dimensioni LxH 3500 x 2500 mm, con doppio vetrocamera U_g 0,7 W/m²K - norma UNI EN 14351-1

Conforme alla normativa CE-EN 13659



PROFILES

Profiles extruded aluminium alloy 6060 as UNI 9006/1 (88/90). The finishing state is T5

ARMOURING

Armored profiles with AISI 430 stainless steel plates, 4 mm thick, placed on the outside of the frame profile to protect accessories and insertion of armored glass

ACCESSORIES

- . Handle with cylinder and breaking system controlled
- . Lock with half security cylinder
- . N°4 trolleys for door with high capacity steel bearings
- . Self-hooking central rostrum in extruded aluminum
- . Increased anti-burglary closures in stainless steel
- . Safety perimeter pins in stainless steel, diameter 12 mm
- . EPDM gaskets and teflon brushes
- . Stainless steel screws

SPECIFICATIONS AND DIMENSIONS

Security system composed of extruded aluminum profiles with thermal break section 253mm frame / 105 leaf. The latter placed on double drawn stainless steel guides to ensure high doors and less friction.

Thermal insulation made with 27mm polyamide spacers on doors and frames.

GLAZING

The Ikona Slide Blindo series uses armored glass anticrime in class P6B/P8B glass-chamber with thermal channels

FINISHES

- . RAL, wrinkled and gothic colors are painted with thermosetting polyester powders and polymerised in the oven in compliance with the "Qualicoat" quality procedures.
- . Wood effects realized with sublimation film (heat transfer "heat transfer") in compliance with the "Qualideco" procedures
- . Anodic oxidation has a thickness class > of 15 microns

PERFORMANCE AND CERTIFICATIONS

- . **BURGLAR-RESISTANT CLASS RC4** - standard UNI ENV 1227/30:2011
- . **AIR PERMEABILITY CLASS 3** - standard EN 12207
- . **WATER TIGHTNESS CLASS 7A** - standard EN 12208
- . **WIND LOAD RESISTANCE CLASS C5** - standard EN 12210
- . **NOISE REDUCTION 35 dB** - standard EN 140-1 33
- . **THERMAL TRASMITTANCE U_w 1.2 W/m²K** - value achieved with a window 2 leaves with dimensions LxH 3500 x 2500 mm, double insulated glass U_g 0,7 W/m²K - norma UNI EN 14351-1

Comply with CE-EN 13659